


AcousticLUX 3

TECHNICAL DATA SHEET

1180 x 1180 x 68mm

- Suspended acoustic LED luminaire
- Light Distribution: Direct
- Optical System: Opal polycarbonate diffuser
- Housing: Aluminium
- Colour: White (RAL9003S), custom RAL available

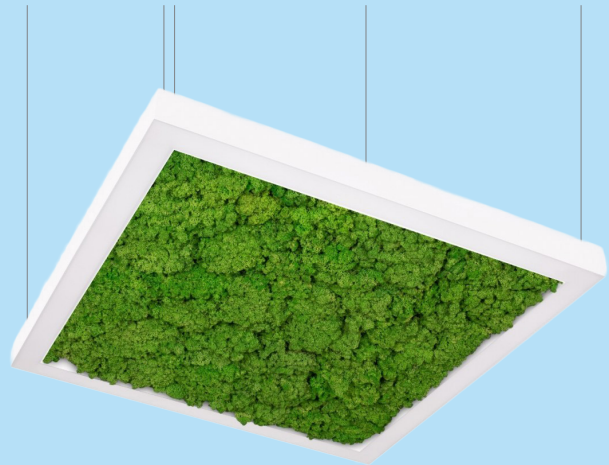

ELECTRICAL DATA

Main Voltage:	220-240V, 0/50/60Hz
Power Factor:	>0,95
Integrated Sensor:	

System power*, W:	24.8w to 103.7w
Control gear:	ECG On/off or Dali

LIGHTING DATA

Luminaire output*,lm(ta+25°C):	3200lm TO 11700lm
CRI (Ra):	80+, CRI90 on request
SDCM:	3
Distribution Type:	Direct
UGR Index:	<19

System efficacy, lm/W:	Up to 130
CCT, K:	4000
Light Distribution:	Direct
LED lifetime, h:	50000/L80B10

TECHNICAL DATA

Dimensions, mm:	L1180 W1180 68
Net weight, kg:	13.4

Quantity in package, pcs:	1
---------------------------	---


STANDARDS

Operating temperature range, °C:	ta0...+35
Ingress protection code:	IP40


Mechanical impact resistance:	IK05
Certificates:	CE, ROHS

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.

TECHNICAL DRAWING

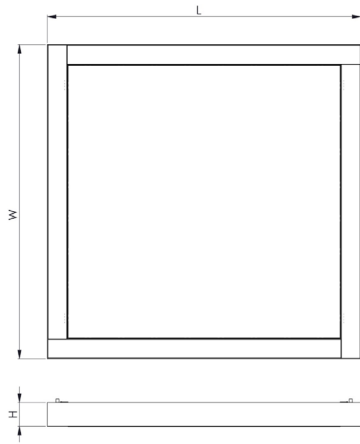

LIGHT DISTRIBUTION CURVE

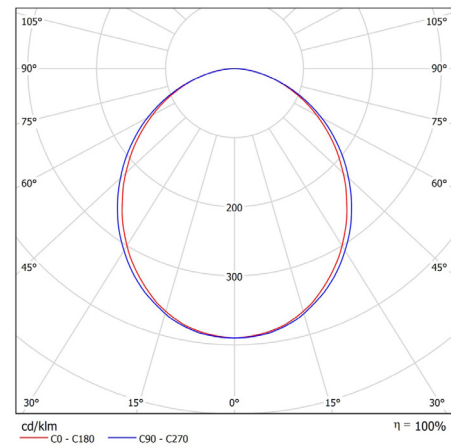

PRODUCTS

COLOUR (K)	LUMINAIRE OUTPUT (LLM)	POWER (W)	EFFICACY (LLM/W)	PART CODE
4000	6295	48.5	130	ACLX3/1212/6300/4K
4000	8567	70	122	ACLX3/1212/8600/4K
4000	11618	103.7	112	ACLX3/1212/12700/4K

OPTIONS

	PART CODE
DALI driver	/DD
3 Hour emergency	/E3S
3 hour DALI emergency	/E3D
4C MESH	/MM

	PART CODE
4C MESH with Sensor	/MMS
Integrated DALI sensor	/IDS
Custom RAL	/RAL

EXAMPLE PART CODE: ACLX3/66/3200/4K/DD/E3D

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.