


GridLUX 1

1200 x 600mm

- Recessed LED luminaire fits most grid ceilings
- Light Distribution: Direct
- Optical System: matt micro-prismatic PMMA diffuser, low glare TP(a)
- Housing: Steel
- Colour: White (RAL9003), other colours available on request

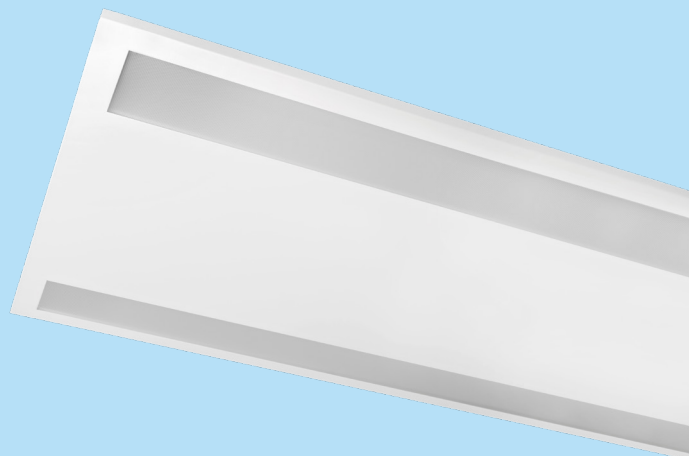

TECHNICAL DATA SHEET

ELECTRICAL DATA

Main Voltage:	220-240V, 0/50/60Hz
Power Factor:	>0,95
Integrated Sensor:	Available

System power*, W:	34w to 65w
Control gear:	ECG On/off or Dali

LIGHTING DATA

Luminaire output*,lm(ta+25°C):	5100 to 10100
CRI (Ra):	80+, CRI90 on request
SDCM:	3
Distribution Type:	Direct
UGR Index:	<19

System efficacy, lm/W:	Up to 156
CCT, K:	3000 and 4000
Light Distribution:	Symmetrical wide beam
Beam angle, °:	90
LED lifetime, h:	100000/L80B10

TECHNICAL DATA

Dimensions, mm:	L1195 x W595 x H47
Net weight, kg:	6.2

Quantity in package, pcs:	1
---------------------------	---


STANDARDS

Operating temperature range, °C:	ta0...+35
Ingress protection code:	IP44/20


Mechanical impact resistance:	IK05
Certificates:	CE, ROHS

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.

TECHNICAL DRAWING

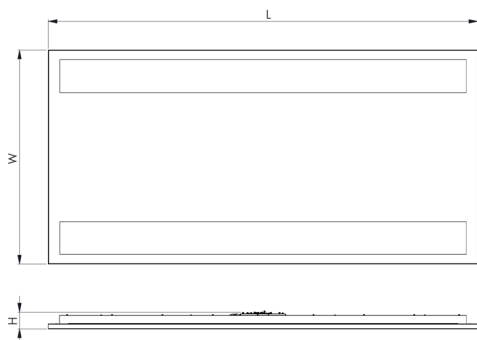

LIGHT DISTRIBUTION CURVE

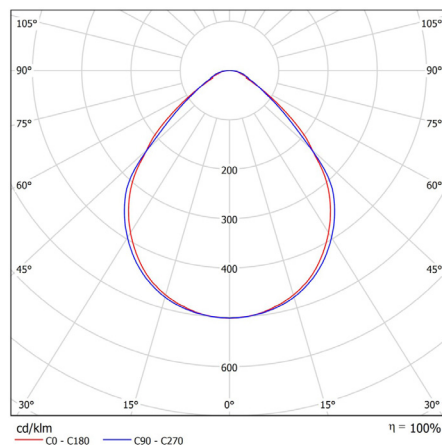

PRODUCTS

COLOUR (K)	LUMINAIRE OUTPUT (LLM)	POWER (W)	EFFICACY (LLM/W)	PART CODE
3000	5103	34.5	148	GRLX1/126/5100/3K
3000	7070	50.7	140	GRLX1/126/7050/3K
3000	9623	65.1	148	GRLX1/126/9600/3K
4000	5379	34.5	156	GRLX1/126/5300/4K
4000	7452	50.7	147	GRLX1/126/7400/4K
4000	10143	65.1	156	GRLX1/126/10100/4K

OPTIONS

	PART CODE
DALI driver	/DD
3 Hour emergency	/E3S
3 hour DALI emergency	/E3D
MeritMESH	/MM
MeritMESH with Sensor	/MMS

	PART CODE
Integrated DALI sensor	/IDS
Air handling slots	/HAL
Plasterboard mounting frame	/PBF
Custom RAL	/RAL

EXAMPLE PART CODE: GRLX1/126/5300/4K/DD/E3D

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.