

GridLUX 2

TECHNICAL DATA SHEET

1200 x 300mm

- Recessed LED luminaire fits most grid ceilings
- Light Distribution: Direct
- Optical System: double parabolic reflector with lenses, UGR <16 ultra-low glare
- Housing: Steel
- Colour: White (RAL9003), other colours available on request



ELECTRICAL DATA

Main Voltage:	220-240V, 0/50/60Hz	System power*, W:	17w to 30w
Power Factor:	>0,95	Control gear:	ECG On/off or Dali
Integrated Sensor:	Available		

LIGHTING DATA

Luminaire output*, lm(ta+25°C):	2800 to 4900	System efficacy, lm/W:	Up to 166
CRI (Ra):	80+, CRI90 on request	CCT, K:	3000 and 4000
SDCM:	3	Light Distribution:	Symmetrical wide beam
Distribution Type:	Direct	Beam angle, °:	77
UGR Index:	<16	LED lifetime, h:	100000/L80B10

TECHNICAL DATA

Dimensions, mm:	L1195 x W295 x H31	Quantity in package, pcs:	1
Net weight, kg:	2.8		

STANDARDS


Operating temperature range, °C:	ta0...+35	Mechanical impact resistance:	IK05
Ingress protection code:	IP40/20	Certificates:	CE, ROHS

Note: Tolerance range for optical and electrical data: ±10%. MERIT LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.


GridLUX 2

TECHNICAL DATA SHEET

TECHNICAL DRAWING

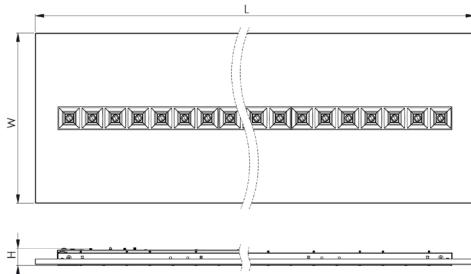

LIGHT DISTRIBUTION CURVE

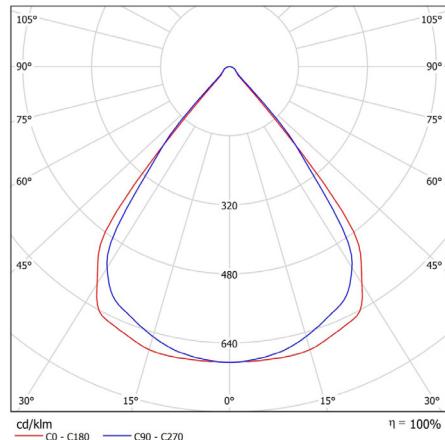

PRODUCTS

COLOUR (K)	LUMINAIRE OUTPUT (LLM)	POWER (W)	EFFICACY (LLM/W)	PART CODE
3000	2770	17.6	157	GLX2/123/2800/3K
3000	3399	21.9	155	GLX2/123/3400/3K
3000	4006	26.1	153	GLX2/123/4000/3K
3000	4617	30.8	150	GLX2/123/4600/3K
4000	2920	17.6	166	GLX2/123/2900/4K
4000	3583	21.9	164	GLX2/123/3600/4K
4000	4222	26.1	162	GLX2/123/4200/4K
4000	4867	30.8	158	GLX2/123/4900/4K

OPTIONS

	PART CODE		PART CODE
DALI driver	/DD	Integrated DALI sensor	/IDS
3 Hour emergency	/E3S	Air handling slots	/HAL
3 hour DALI emergency	/E3D	Plasterboard mounting frame	/PBF
MeritMESH	/MM	Custom RAL	/RAL
MeritMESH with Sensor	/MMS		

EXAMPLE PART CODE: GLX2/123/2900/4K/DD/E3D

Note: Tolerance range for optical and electrical data: ±10%. MERIT LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.