

GRIDLUX 7

TECHNICAL DATA SHEET

600 x 600mm

- Recessed LED luminaire fits most grid ceilings
- Light Distribution: Direct/Indirect
- Optical System: low glare matt micro-prismatic PMMA diffuser
- Housing: Steel
- Colour: White (RAL9003)



ELECTRICAL DATA

Main Voltage:	220-240V, 0/50/60Hz
Power Factor:	>0,95
Integrated Sensor:	Available

System power*, W:	17w to 38w
Control gear:	ECG On/off or Dali

LIGHTING DATA

Luminaire output*, lm(ta+25°C):	2200 to 4900
CRI (Ra):	80+, CRI90 on request
SDCM:	3
Distribution Type:	Direct
UGR Index:	<19

System efficacy, lm/W:	Up to 136
CCT, K:	3000 and 4000
Light Distribution:	Symmetrical wide beam
Beam angle, °:	90
LED lifetime, h:	50000/L80B10

TECHNICAL DATA

Dimensions, mm:	L595 x W595 x H82
Net weight, kg:	3

Quantity in package, pcs:	1
---------------------------	---

STANDARDS

Operating temperature range, °C:	ta0...+35
Ingress protection code:	IP44


Mechanical impact resistance:	IK05
Certificates:	CE, ROHS

Note: Tolerance range for optical and electrical data: ±10%. MERIT LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.


GRIDLUX 7

TECHNICAL DATA SHEET

TECHNICAL DRAWING

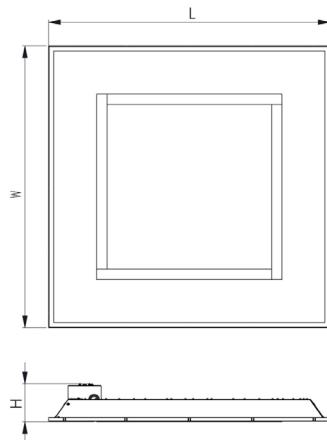

LIGHT DISTRIBUTION CURVE

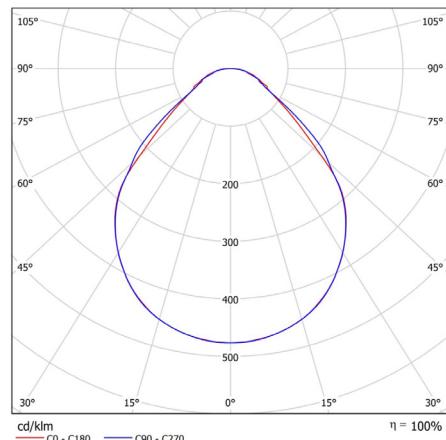

PRODUCTS

COLOUR (K)	LUMINAIRE OUTPUT (LLM)	POWER (W)	EFFICACY (LLM/W)	PART CODE
3000	2221	17.1	130	GLX7/66/2200/3K
3000	2754	21.2	130	GLX7/66/2800/3K
3000	3276	25.4	129	GLX7/66/3300/3K
3000	3753	29.7	126	GLX7/66/3800/3K
3000	5690	38.9	121	GLX7/66/5700/3K
4000	2326	17.1	136	GLX7/66/2300/4K
4000	2884	21.2	136	GLX7/66/2900/4K
4000	3430	25.4	135	GLX7/66/3400/4K
4000	3929	29.7	132	GLX7/66/3900/4K
4000	4910	38.9	126	GLX7/66/4900/4K

OPTIONS

	PART CODE		PART CODE
DALI driver	/DD	Integrated DALI sensor	/IDS
3 Hour emergency	/E3S	Air handling slots	/HAL
3 hour DALI emergency	/E3D	Plasterboard mounting frame	/PBF
MeritMESH	/MM	Custom RAL	/RAL
MeritMESH with Sensor	/MMS		

EXAMPLE PART CODE:

GLX7/66/2300/4K/DD/E3D

Note: Tolerance range for optical and electrical data: ±10%. MERIT LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.