

SurfaceLUX 4

TECHNICAL DATA SHEET

1500 x 50mm

- Surface mounted LED luminaire
- Light Distribution: Direct
- Optical System: Double parabolic reflector with lenses, low glare
- Housing: Steel
- Colour: White (RAL9003S)



ELECTRICAL DATA

Main Voltage:	220-240V, 0/50/60Hz
Power Factor:	>0,95
Integrated Sensor:	Available

System power*, W:	21.7w to 37.8w
Control gear:	ECG On/off or Dali

LIGHTING DATA

Luminaire output*,lm(ta+25°C):	3500lm to 6100lm
CRI (Ra):	80+, CRI90 on request
SDCM:	3
Distribution Type:	Direct
UGR Index:	<16

System efficacy, lm/W:	Up to 168
CCT, K:	3000 and 4000
Light Distribution:	Medium-Wide beam
Beam angle, °:	74x78
LED lifetime, h:	100000/L80B10

TECHNICAL DATA

Dimensions, mm:	L1524 x W47 x H74
Net weight, kg:	2.7

Quantity in package, pcs:	1
---------------------------	---


STANDARDS

Operating temperature range, °C:	ta0...+35
Ingress protection code:	IP40/20


Mechanical impact resistance:	IK05
Certificates:	CE, ROHS

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.

TECHNICAL DRAWING

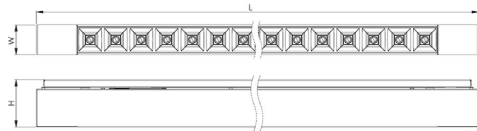

LIGHT DISTRIBUTION CURVE

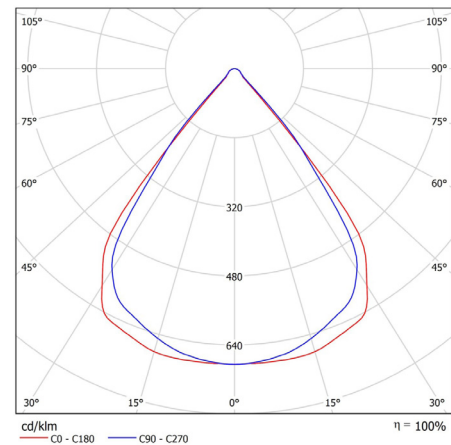

PRODUCTS

COLOUR (K)	LUMINAIRE OUTPUT (LLM)	POWER (W)	EFFICACY (LLM/W)	PART CODE
3000	3463	21.7	160	SFLX6/1550/3500/3K
3000	4249	26.8	159	SFLX6/1550/4200/3K
3000	5008	32	157	SFLX6/1550/5000/3K
3000	5831	37.8	154	SFLX6/1550/5800/3K
4000	3650	21.7	168	SFLX6/1550/3700/4K
4000	4479	26.8	167	SFLX6/1550/4500/4K
4000	5278	32	165	SFLX6/1550/5300/4K
4000	6147	37.8	163	SFLX6/1550/6100/4K

OPTIONS

	PART CODE
DALI driver	/DD
3 Hour emergency	/E3S
3 hour DALI emergency	/E3D
4CMESH	/MM

	PART CODE
4CMESH with Sensor	/MMS
Integrated DALI sensor	/IDS
Custom RAL	/RAL

EXAMPLE PART CODE: SFLX6/1550/3700/4K/DD/E3D

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.