


ArcLUX 19

TECHNICAL DATA SHEET

1200mm

- Decorative, surface or suspended
- Light Distribution: Wide-wide beam
- Optical System: Matt micro-prismatic polycarbonate diffuser
- Housing: Steel
- Colour: White
(Custom RAL Available)

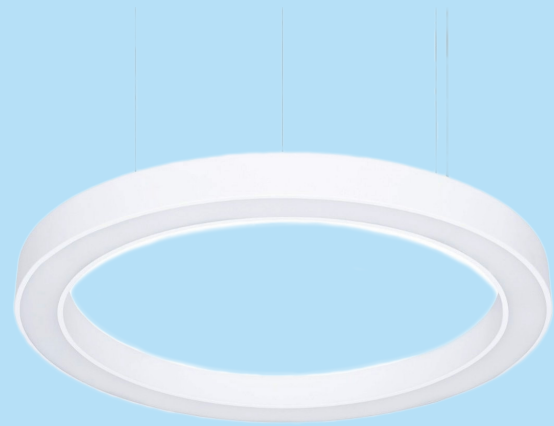

ELECTRICAL DATA

Main Voltage:	220-240V, 0/50/60Hz
Power Factor:	>0.92
Integrated Sensor:	Available

System power*, W:	34.8w to 72.4w
Control gear:	ECG On/off or Dali

LIGHTING DATA

Luminaire output*,lm(ta+25°C):	3614lm to 7087lm
CRI (Ra):	CRI80
SDCM:	3
Distribution Type:	Direct
UGR Index:	<19

System efficacy, lm/W:	Up to 109
CCT, K:	3000 to 4000
Light Distribution:	Wide-wide beam
Beam Angle °:	90° x 92°
LED lifetime, h:	50000/L80B10

TECHNICAL DATA

Dimensions, mm:	DIA:1200mm H:80mm
Net weight, kg:	8.9

Quantity in package, pcs:	1
---------------------------	---

STANDARDS

Operating temperature range, °C:	ta 0...+35
Ingress protection code:	IP20

Mechanical impact resistance:	IK02
Certificates:	CE, UKCA, ROHS

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.

