


# EmLUX 12

## TECHNICAL DATA SHEET

- Robust bulkhead, suitable for high ceilings, high LOR for efficiency
- Light Distribution: Direct
- Optical System: Opal diffuser
- Housing: Steel
- Colour: White

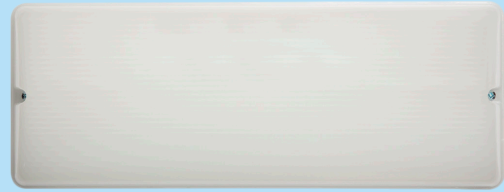

### ELECTRICAL DATA

Main Voltage:	220-240V, 0/50/60Hz
Power Factor:	>0.92

System power*, W:	2.8w
Control gear:	Standard / Dali Self Test

### LIGHTING DATA

Luminaire output*,lm(ta+25°C):	358lm emergency/1163lm mains
CRI (Ra):	CRI70
Distribution Type:	Direct

CCT, K:	4000
Light Distribution:	Direct
Beam Angle °:	125° x 117°

### TECHNICAL DATA

Dimensions, mm:	L:370mm W:140mm H:89mm
Net weight, kg:	2.1

Quantity in package, pcs:	1
---------------------------	---

### STANDARDS


Operating temperature range, °C:	ta 0...+35
Ingress protection code:	IP65

Mechanical impact resistance:	IK10
Certificates:	CE, UKCA, ROHS

**Note:** Tolerance range for optical and electrical data:  $\pm 10\%$ . 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.

### TECHNICAL DRAWING

### LIGHT DISTRIBUTION CURVE

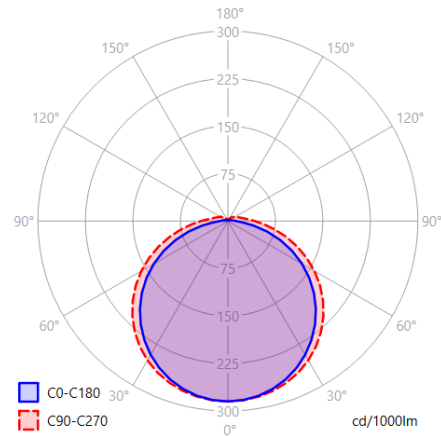

### OPTIONS

	PART CODE
3 Hour standard emergency	/E3S
3 hour DALI emergency	/E3D
4C MESH	/MM
Custom RAL Bezel	/RAL

	PART CODE
Arrow up	/ARU
Arrow down	/ARD
Arrow Left	/ARL
Arrow Right	/ARR

**EXAMPLE PART CODE:** EMLX12/E3D

**Note:** Tolerance range for optical and electrical data:  $\pm 10\%$ . 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.