

EmLUX 14

TECHNICAL DATA SHEET

- Stylish and compact emergency lighting, surface mounted - other options available.
- Light Distribution: Direct
- Optical System: Clear diffuser
- Housing: Polycarbonate
- Colour: White



ELECTRICAL DATA

Main Voltage:	220-240V, 0/50/60Hz
Power Factor:	>0.92

System power*, W:	5.7w
Control gear:	Standard / Dali Self Test

LIGHTING DATA

Luminaire output*,lm(ta+25°C):	325lm
CRI (Ra):	CRI70
Distribution Type:	Direct

CCT, K:	4000
Light Distribution:	Direct

TECHNICAL DATA

Dimensions, mm:	L:275mm W:45mm H:140mm
Net weight, kg:	0.75

Quantity in package, pcs:	1
---------------------------	---


STANDARDS

Operating temperature range, °C:	ta 0...+35
Ingress protection code:	IP65


Certificates:	CE, UKCA, ROHS
---------------	----------------

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.

TECHNICAL DRAWING

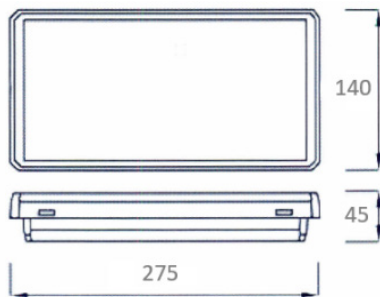

LIGHT DISTRIBUTION CURVE

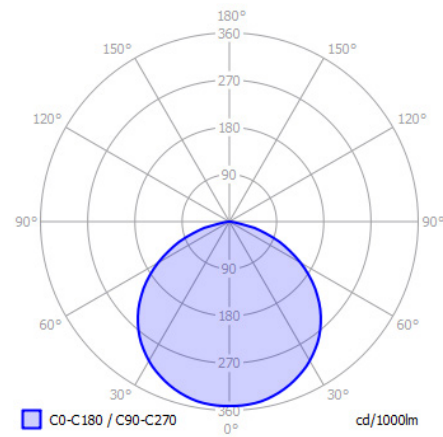

OPTIONS

	PART CODE
3 Hour standard emergency	/E3S
3 hour DALI emergency	/E3D
4C MESH	/MM

	PART CODE
Custom RAL Bezel	/RAL
Recessed mounted	/RCD
Pendant mounted	/PDT

EXAMPLE PART CODE: EMLX14/E3D

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.