


EmLUX 16

TECHNICAL DATA SHEET

- Bulkhead emergency lighting
- Light Distribution: Direct
- Housing: Polycarbonate
- Colour: White

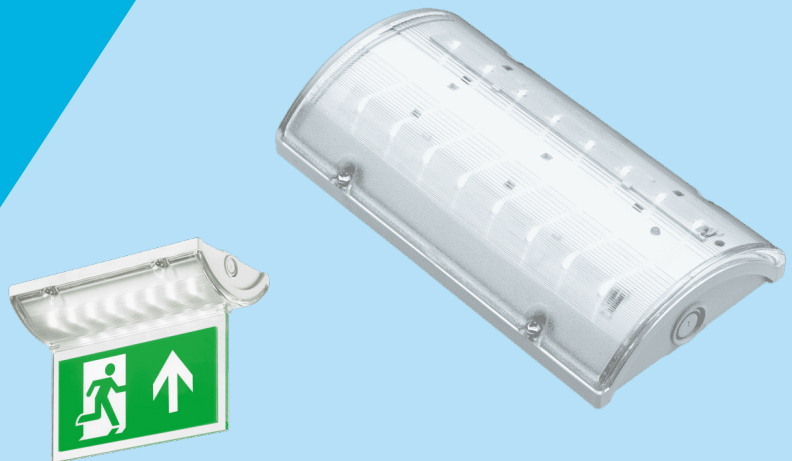

ELECTRICAL DATA

Main Voltage:	220-240V, 0/50/60Hz
Power Factor:	>0.92

System power*, W:	3w
Control gear:	Maintained / Dali

LIGHTING DATA

Luminaire output*,lm(ta+25°C):	150lm
Distribution Type:	Direct

CCT, K:	4500
Light Distribution:	Direct

TECHNICAL DATA

Dimensions, mm:	L:240mm W:130mm H:50mm
Net weight, kg:	1kg

Quantity in package, pcs:	1
---------------------------	---


STANDARDS

Operating temperature range, °C:	ta 0...+25
Ingress protection code:	IP65


Certificates:	CE, UKCA, ROHS
---------------	----------------

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.

TECHNICAL DRAWING

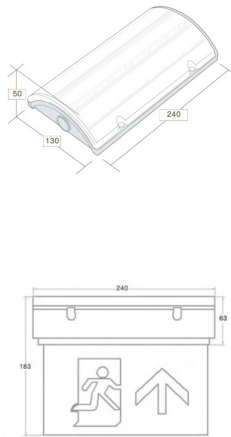

LIGHT DISTRIBUTION CURVE

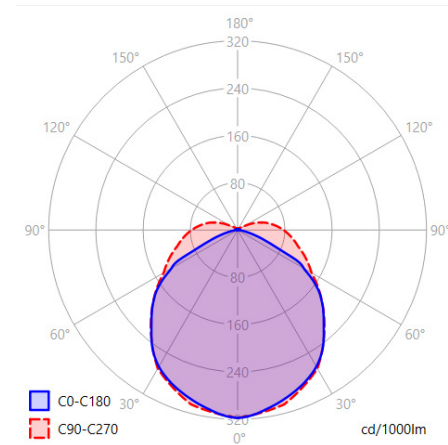

OPTIONS

	PART CODE
3 Hour emergency	/E3S
3 hour DALI emergency	/E3D
4C MESH	/MM

	PART CODE
Custom RAL Bezel	/RAL
Blade Legend (specify direction)	/BLD
Self adhesive legend kit	/SAL

EXAMPLE PART CODE: EMLX16/E3D

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.