

EmLUX 9

TECHNICAL DATA SHEET

- LED exit sign, ceiling or wall mounted, plexi glass screen with 25m viewing distance
- Housing: Polycarbonate
- Colour: White



ELECTRICAL DATA

Main Voltage: 220-240V, 0/50/60Hz
Power Factor: >0.92

System power*, W: 5.7w
Control gear: Standard / Dali Self Test

TECHNICAL DATA

Dimensions, mm: L:297mm W:52mm H:222mm
Net weight, kg: 0.82

Quantity in package, pcs: 1


STANDARDS

Ingress protection code: IP40

Certificates: CE, UKCA, ROHS

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.

TECHNICAL DRAWING

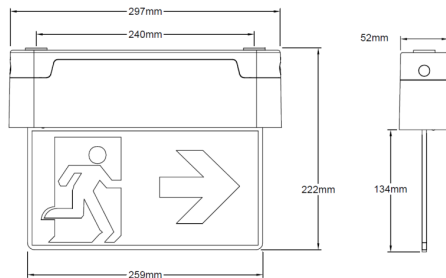

OPTIONS

	PART CODE
3 Hour standard emergency	/E3S
3 hour DALI emergency	/E3D
4CMESH	/MM
Custom RAL Bezel	/RAL

	PART CODE
Arrow up	/ARU
Arrow down	/ARD
Arrow Left	/ARL
Arrow Right	/ARR

EXAMPLE PART CODE: EMLX9/E3D/ARU

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.