

VandalLUX 2

TECHNICAL DATA SHEET

700mm

- Surface mounted, vandal resistant, frame with stainless steel security screws
- Light Distribution: Direct/Asymmetrical
- Optical System:
Opal Polycarbonate Diffuser
- Housing: Zinc Plated Steel
- Colour: White



ELECTRICAL DATA

Main Voltage:	220-240V, 0/50/60Hz
Power Factor:	>0,90
Integrated Sensor:	Available

System power*, W:	13.7w to 21.8w
Control gear:	ECG On/off or Dali

LIGHTING DATA

Luminaire output*,lm(ta+25°C):	1598 to 2899
CRI (Ra):	80+
SDCM:	3
Distribution Type:	Direct
UGR Index:	<22

System efficacy, lm/W:	Up to 133
CCT, K:	3000 to 4000
Light Distribution:	Direct/Asymmetrical
Beam angle, °:	Asymmetrical
LED lifetime, h:	100000/L80B10

TECHNICAL DATA

Dimensions, mm:	L:660 H:150 W:65
Net weight, kg:	3.5

Quantity in package, pcs:	1
---------------------------	---


STANDARDS

Operating temperature range, °C:	ta -20... +40
Ingress protection code:	IP65


Mechanical impact resistance:	IK10+
Certificates:	CE, UKCA, RoHS

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.

TECHNICAL DRAWING



LIGHT DISTRIBUTION CURVE

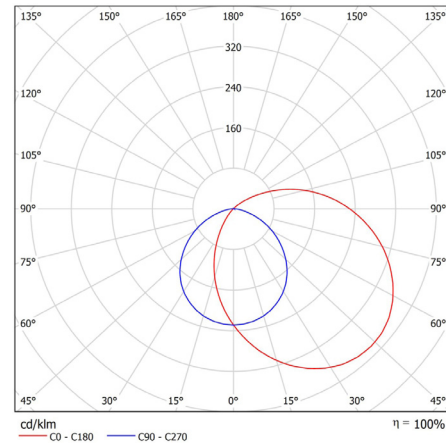

PRODUCTS

COLOUR (K)	LUMINAIRE OUTPUT (LLM)	POWER (W)	EFFICACY (LLM/W)	PART CODE
3000	1598	13.7	117	VLX2/660/1600/3K
3000	2214	18.8	118	VLX2/660/2210/3K
3000	2751	21.8	126	VLX2/660/2750/3K
4000	1685	13.8	122	VLX2/660/1690/4K
4000	2334	18.8	124	VLX2/660/2330/4K
4000	2899	21.8	133	VLX2/660/2900/4K

OPTIONS

	PART CODE		PART CODE
DALI driver	/DD	4CMESH	/MM
3 Hour emergency	/E3S	4CMESH with Sensor	/MMS
3 hour DALI emergency	/E3D	Integrated DALI sensor	/IDS

EXAMPLE PART CODE: VLX2/660/1690/4K/DD/E3D

Note: Tolerance range for optical and electrical data: $\pm 10\%$. 4C LIGHTING SOLUTIONS is constantly developing and improving its products. The right is reserved to change any product specifications without prior notification.